

**Atlas Copco** Surface Drill Rigs

# **AirROC D35 (LM 100)**



**Hole range : 76 - 115 mm**

*Sustainable Productivity*

**Atlas Copco**

# Features and technical information

For further information, please contact your local Atlas Copco Customer Center.


The AirROC D35\* is the smallest and most popular of our crawler mounted, Down-the-Hole drilling rigs. This robust pneumatic rig is self propelled, easy to operate and simple to maintain. A single operator machine with outstanding flexibility, the AirROC D35\* is an ideal choice for development work in confined areas or production drilling on developed benches.

This compact crawler has a main frame walking beam oscillator that ensures tracks adapt to uneven terrain. Tramming controls are located beside the left track. A 7.5 hp (5.5 kW) air powered hydraulic pump ensures efficient operational positioning. Powered by two independent 4.5 hp air motors for quick and smooth tramming the AirROC D35\* is equipped with the heavy duty BRH rotary head for Down-the-Hole drilling.

\*Formerly known as LM 100



## Drill coverage area

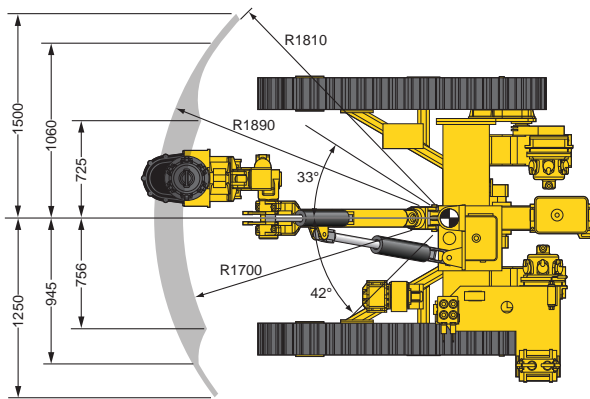

Horizontal reach (mm)

## Technical data

### Carrier

Tramming speed, max	3.2 km/h	2.0 mph
Track oscillation	±20°	

### Steel feed

AirROC D35		
Feed extension	750 mm	29.4"
Feed rate, max	0.3 m/s	59.0 ft/min
Feed force, max	21 kN	4 720 lbf
Tractive pull, max	15 kN	3 372 lbf
Total length	5 130 mm	202"
Travel length	3 565 mm	140.4"

### Drill tube size

Drill rig	Pipe size	
AirROC D35	64, 76 mm	2.5", 3"

### Transport dimensions

Transportation position		
Height	2 325 mm	7'7 1/2"
Length	5 120 mm	16'9 1/2"
Width	1 940 mm	6'4 1/2"

### Weight

AirROC D35	2 690 kg	5 930 lb
------------	----------	----------

Legal Notice: © Copyright 2010, Atlas Copco Rock Drills AB, Orebro, Sweden. All product names in this publication are trademarks of Atlas Copco. Any unauthorized use or copying of the contents or any part thereof is prohibited. Illustrations and photos may show equipment with optional extras. No warranty is made regarding specifications or otherwise. Specifications and equipment are subject to change without notice. Consult your Atlas Copco Customer Center for specific information.